

Table of Contents

1. Introduction4

2. Operational Specification4

2.1 Environment4

 2.1.1 Temperature4

 2.1.2 Relative Humidity5

 2.1.3 Altitude5

2.2 Transportation5

 2.2.1 Vibration Test (Package, Non-Operating)5

 2.2.2 Drop Test (Package, Non-Operating)5

 2.2.3 Vibration Test (Unpackaged, Non-Operating)6

 2.2.4 HALF-SINE SHOCK6

2.3 Packing Configuration7

 2.3.1 Container Specification7

 2.3.2 Carton Specification8

 2.3.3 Pallet Specification8

 2.3.4 Container Carrying Capacity8

2.4 Electrostatic Discharge Requirements9

2.5 Safety Requirements9

2.6 EMI Requirements9

2.7 Reliability9

2.8 Mechanical Design for TCO 03:9

2.9 Environment Protection Design:10

2.10 Acoustical Noise10

3. Input / Output Signal Specification10

3.1 Input Signal Requirements10

 3.1.1 Signal cable (Directly attached to unit)10

 3.1.2 Video signals:11

 3.1.3 Sync signal:11

3.2 Function11

 3.2.1 Support timing11

Table of Contents

3.3 Number of display colors:13

3.4 Adjustment function13

3.5 Power Supply Requirements.....13

 3.5.1 Input Power Requirements..... 13

 3.5.2 Output Power Requirement..... 14

 3.5.3 Power Management..... 14

3.6 Specification of Inverter14

3.7 Panel optical Characteristics15

4. Functional specification17

4.1 Display Quality.....17

 4.1.1 Display Data Area (with full white pattern)..... 17

 4.1.2 Video Performance..... 18

 4.1.3 Light Output..... 18

 4.1.4 Brightness Adjustment Range 18

5. Physical Specifications.....18

5.1 Physical Dimension & Appearance18

 5.1.1 Overall Dimensions: 18

 5.1.2 Outer Appearance: 18

5.2 Construction and Materials on outer surface18

5.3 Base.....18

5.4 Marking & Labels.....18

 5.4.1 Reference Label (Rear panel) 18

 5.4.2 Controls & Connectors 18

5.5 Packaging.....18

 5.5.1 Carton Dimension: 18

 5.5.2 Shipping Weight: 18

 5.5.3 Shipping Container: 18

6. Maintainability Specifications19

6.1 General & Requirements19

 6.1.1 Installation: 19

 6.1.2 Periodic Maintenance: 19

 6.1.3 Repair & Calibration: 19

Table of Contents

6.2 Mean Time to Repair.....19

6.2.1 Module Level:..... 19

6.2.2 Component Level:..... 19

6.3 Accessibility19

6.3.1 General:..... 19

6.3.2 Outside Cabinet, access to the following elements 19

6.3.3 Cover Removal, Access..... 19

6.4 Equipment & Tools Required.....19

6.4.1 Standard Test Equipment 19

6.4.2 Documentation..... 19

6.5 Electrical Emission and Energy Saving summary for TCO 03.....19

6.5.1 Electrical Field(AC):..... 19

6.5.2 Magnetic Field(AC):..... 19

6.5.3 Energy Saving: 19

Appendix 1 – Shipment Conditions.....20

Fig. 1 Physical Dimension Front View and Side view20

Q7T3-FP737S-Dual function LCD Monitor Service

Engineering Specification

1. Introduction

This specification describes a 17.0" color TFT LCD monitor which is supported by dual(analog and DVI) interface solution and support maximum resolution 1280x1024 at 76 Hz refresh rate. No speakers are expected. Besides, tilt and wall mount function are equipped. It has the following features:

- User controls:

- (a) "Power on/off" switch.
- (b) "Exit" key(Back to main menus or leave OSD menu and hot key of Input selection).
- (c) "I-key"(For auto adjust vertical position, phase, horizontal position and pixel clock).
- (d) "Enter" key(For enter sub-menus or select items.).
- (e) "Left" key (Select left, decreasing adjust and hot key of Contrast adjustment).
- (f) "Right" key (Select right, increasing adjust and hot key of Brightness adjustment).

- OSD window for control and information display with 8 languages selection.

- DPMS (Display Power Management System)

- Power on/off indicator.

- High quality advanced zoom function (Scaling function)

- Tilt base : Attached base with 0~25 degree tilt.

-DDC2B function supported.

- A LCD monitor

(a)Head part:

- (1) A LCD module(LG M170E01-A5NC).
- (2) An AC power and inverter board.
- (3) An Interface board.
- (4) A control board.
- (5) A signal cable with 15pin D-sub and 24 pin DVI connector .

(b) Base part:

(1)Tilt base.

(2)Foldable

- A power cord

- An user menu.

-Setup disk. (including .INF/.ICM/Test pattern) --all INF/ICM/Test pattern are loaded in CD manual + Quick start guide

2. Operational Specification

2.1 Environment

2.1.1 Temperature

-Operating 0 to 40 °C

-Storage -20 to 60 °C

2.1.2 Relative Humidity

- Operating 10 to 90% Max. (non-condensing)
- Storage 5 to 95% Max. (non-condensing)

2.1.3 Altitude

- Operating 0 to 3,048m (12,000ft)
- Storage 0 to 12,192m (40,000ft)

2.2 Transportation

2.2.1 Vibration Test (Package, Non-Operating)

A) Sine-wave vibration for initial resonance sweeps and dwell

* Sine sweep

| Frequency (Hz) | Status |
|----------------|--------|
| 5 ~ 26.6 | 0.6G |
| 26.6 ~ 50 | 0.016" |
| 50 ~ 500 | 1.5G |

Sweep times: 1 sweep / Per Axis (X,Y, and Z Axis)

* One major resonance dwell is required for each axis.

Total dwell time at each resonance point shall be 15 minutes.

B) Random Vibration

| Frequency (Hz) | Slope (dB/Oct.) | Spectrum Level (g2/Hz) |
|----------------|------------------|------------------------|
| 5 ~ 100 | 0 | 0.015 |
| 100 ~ 200 | -6 | --- |
| 200 | --- | 0.0038 |

Equivalent to 1.47 G rms

* Duration: 30 Minutes / Per Axis (X,Y, and Z Axis)

Total test time : 90 Minutes

2.2.2 Drop Test (Package, Non-Operating)


A) Drop Height

| Weight (Kg) | ACM Spec. Height (cm) |
|----------------|-----------------------|
| 0 – 9 | 91 |
| > 9 - 18.2 | 76 |
| > 18.2 - 27.2 | 61 |
| > 27.2 - 45.4 | 46 |
| > 45.4 - 68.1 | 31 |
| > 68.1 – 113.5 | 26 |

Upgrade one level of height before MP.

B) Drop Sequence

- Surface
1. Top
 2. Front
 3. Bottom
 4. Rear
 5. Right
 6. Left

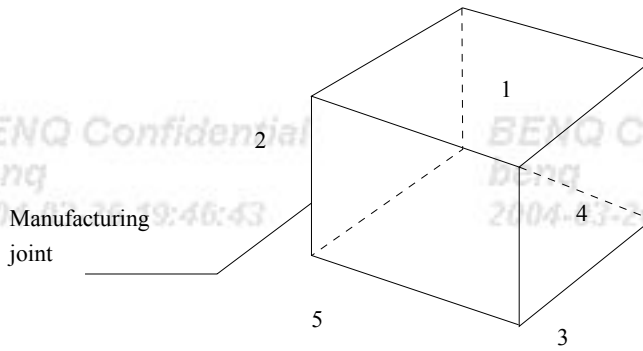

-Corner 5-3-2

select at weakness side [the low left(or right) corner of the front panel]

- An edge drop with impact on the shortest edge radiating from corner 5-3-2
- An edge drop with impact on the next shortest edge radiating from corner 5-3-2
- An edge drop with impact on the longest edge radiating from corner 5-3-2
- A flat drop with impact on the rear
- A flat drop with impact on the front
- A flat drop with impact on the right
- A flat drop with impact on the left
- A flat drop with impact on the bottom
- A flat drop with impact on the top

After test, there is no electrical and mechanical damage permitted.

2.2.3 Vibration Test (Unpackaged, Non-Operating)

5~200Hz at 1.04g rms

| FREQUENCY (Hz) | SPECTRUM LEVEL (g ² /Hz) |
|----------------|-------------------------------------|
| 2.0 | 0.0185 |
| 4.0 | 0.0300 |
| 8.0 | 0.0300 |
| 40.0 | 0.0030 |
| 55.0 | 0.0100 |
| 70.0 | 0.0100 |
| 200.0 | 0.0010 |

- DURATION: 15 MINUTES PER AXIS.

2.2.4 HALF-SINE SHOCK

Test conditions:

Test unit : 2 sets

Each unit has to withstand 18 shocks.(3 shocks pre face)

No-operation

Half-sine wave

Duration : 3ms

Acceleration(G) : 75G

2.3 Packing Configuration

2.3.1 Container Specification

a. Shipping Container

| Container Type | | 20'*8'*8'6" " Steel | 40'*8'*8'6" Steel | 40'*8'*9'6" High Cube Steel |
|--|---------|------------------------|-------------------|------------------------------------|
| Weight (Kegs) | Gross | 24,000 | 30,480 | 30,480 |
| | Tare | 2,370 | 4,000 | 4,200 |
| | Payload | 21,630 | 26,480 | 26,280 |
| Interior Measurement (mm) | Length | 5,898 | 12,031 | 12,031 |
| | Width | 2,352 | 2,352 | 2,352 |
| | Height | 2,394 | 2,394 | 2,699 |
| Volume (Cubic Meter) | | 33.2 | 67.74 | 76.4 |
| Door opening (mm) | Width | 2,340 | 2,340 | 2,340 |
| | Height | 2,280 | 2,280 | 2,585 |
| Useable Interior Dimension (Deducted pallet (130mm & Operating space 50mm) | Length | 5,890 | 12,000 | 12,000 |
| | Width | 2,330 | 2,330 | 2,330 |
| | Height | 2,100 | 2,100 | 2,405 |

b. Air Transport

| Container Type | | Container (1) 125"*96"*96" | Container (2) 125"*96"*118" | Container (3) 125"*88"*64" |
|------------------------------|---------|-------------------------------|--------------------------------|-------------------------------|
| Weight (Kegs) | Gross | 6,804 | 6,804 | 4,627 |
| | Tare | 129 | 129 | 129 |
| | Payload | 6,675 | 6,675 | 4,498 |
| Interior Measurement (mm) | Length | 3,048 | 3,048 | 3,048 |
| | Width | 2,260 | 2,260 | 2,082 |
| | Height | 2,438 | 2,997 | 1,625 |

| | | | |
|----------------------|----|----|----|
| Volume (Cubic Meter) | 17 | 19 | 11 |
|----------------------|----|----|----|

2.3.2 Carton Specification

| | | |
|-------------------------------------|--------|-----|
| Product | Net | 4.4 |
| | Gross | 5.4 |
| Carton Interior Measurement (mm) | Length | 378 |
| | Width | 418 |
| | Height | 139 |
| Carton External Measurement (mm) | Length | 395 |
| | Width | 456 |
| | Height | 146 |

2.3.3 Pallet Specification

a. Dimension

| Transport Type | | Pallet A | Pallet B | Pallet C | Pallet D |
|--|--------|----------|----------|----------|----------|
| Shipping Pallet Dimension (mm) | Length | 812 | 812 | 406 | 406 |
| | Width | 836 | 1254 | 836 | 1254 |
| | Height | 115 | 115 | 115 | 115 |
| Air Transport Pallet Dimension (mm) | Length | X | X | X | X |
| | Width | X | X | X | X |
| | Height | X | X | X | X |

2.3.4 Container Carrying Capacity

a. Shipping Container

| Stowing Type | | Quantity of products (sets) | Quantity of Products (sets) | Quantity of pallet (sets) |
|--------------|-----|--------------------------------|--------------------------------|------------------------------|
| | | (Every container) | (Every Pallet) | (Every Container) |
| with pallet | 20' | 910 | Pallet A: 56 | Pallet A: 6 |
| | | | Pallet B: 84 | Pallet B: 6 |
| | | Pallet C: 28 | Pallet C: 1 | |
| | | Pallet D: 42 | Pallet D: 1 | |
| | 40' | 1960 | Pallet A: 56 | Pallet A: 14 |

| | | | |
|--|--|--------------|--------------|
| | | Pallet B: 84 | Pallet B: 14 |
| | | | |

2.4 Electrostatic Discharge Requirements

The subject product must withstand 8 KV for contact discharge and 15 KV for air discharge of Electrostatic Discharge and meet the acceptance criteria as specified IEC 801-2 .

2.5 Safety Requirements

The display unit complies with the following safety standards and specifications.

- UL compliance...standard for information-processing and business equipment, UL 1950.
- CSA compliance...standard C22.2 No. 950-M89, data processing equipment.
- TUV compliance...EN60950 safety specification-business equipment.
- ISO13406-2 .Ergonomic Requirements of Visual Display.
- Demko...EN60950.
- Nemko...EN60950.
- Semko...EN60950.
- Fimko...EN60950.

2.6 EMI Requirements

1. This display unit complies with the following EMC rules and regulations.

- FCC compliance...FCC Rule, Part 15, Subpart B, Class B.
- VCCI compliance...VCCI Rule, Class-2.
- CE Mark Compliance... 89/336/EEC.
EN55024, EN61000-4-2/-3/-4/-5/-6/-8/-11
EN55022, Class B.
EN61000-3-2,EN61000-3-3.
- DNSF compliance...EN55022, Class B.
- MPR2 compliance
- TCO99
- C-Tick
- BSMI
- EPA

2. The sample for EMI agency approval should be under 4 dB of the limit.

The production pilot run units should be under 3 dB of the limit.

The mass production units should be under 1 dB of the limit.

2.7 Reliability

1. The prediction MTBF of display unit shall be greater than 60,000 hours excluding the lamp.(at 25)

2. Lamp life time : 40,000 hrs typical at which brightness of lamp is 50% compare to that of initial value at

7.0mA and 25 .

2.8 Mechanical Design for TCO 03:

1) Front Frame Reflectance:

* diffuse reflectance: ±10%

* Gloss ± 2% gloss unit

2) Labeling of plastics:

Plastic weight > 25g shall be marked in accordance with ISO11469

3) Variety of Plastic:

Type of plastic material is synonymous with the term basic polymer used in ISO1043-1. For blends of plastics e.g. PC+ABS, all weight ratios are considered to be the same type of material.

4) Painting of Plastic:

Plastic materials weighing more than 25 grams included in the VDU. Different kinds of adapters are defined as parts of

VDU. Printed wiring board laminates and the flat panel itself are excluded.

5) Metallization of Plastic Housing:

* Metallized name-plates and control knobs are accepted.

6) Plastic components > 25g shall not contain retardants of organically bound chloride or bromide.

2.9 Environment Protection Design:

Product is Per ES 715-c49 Environment Design Guide

2.10 Acoustical Noise

With the display operating, the issue of sound measured is contained within 40 dB/A in the audible field.

3. Input / Output Signal Specification

3.1 Input Signal Requirements


3.1.1 Signal cable (Directly attached to unit)

3.1.1.1 Video Inputs:

(1) DSUB –digital Signal Inputs

15pin D-sub connector is on the captive signal cable for IBM VGA, compatible graphic adapters.

The pin assignment of this connector is described as below:




15pin D-sub female

- 1 RED VIDEO
- 2 GREEN VIDEO
- 3 BLUE VIDEO
- 4 GROUND
- 5 Cable Detect
- 6 RED GROUND
- 7 GREEN GROUND
- 8 BLUE GROUND
- 9 PC5V
- 10 SYNC GROUND
- 11 GROUND
- 12 SDA
- 13 H SYNC (H+V)

- 14 V SYNC
- 15 SCL

(2) DVI (digital signal input)

24 pins DVI connector is designed to match with DVI-digital signal cable. The pin assignment of this connector is as the following:

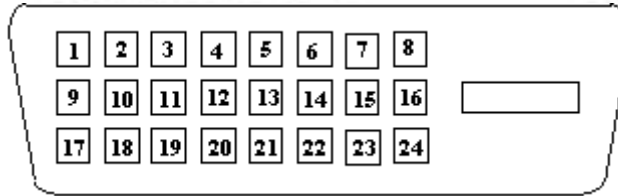

* 24 pins DVI female

| Pin | Signal Assignment | Pin | Signal Assignment |
|-----|-------------------|-----|-------------------|
| 1 | TMDS RX2- | 13 | Floating |
| 2 | TMDS RX2+ | 14 | +5V Power |
| 3 | TMDS Ground | 15 | Ground |
| 4 | Floating | 16 | Hot Plug Detect |
| 5 | Floating | 17 | TMDS RX0- |
| 6 | DDC Clock | 18 | TMDS RX0+ |
| 7 | DDC Data | 19 | TMDS Ground |
| 8 | Floating | 20 | Floating |
| 9 | TMDS RX1- | 21 | Floating |
| 10 | TMDS RX1+ | 22 | TMDS Ground |
| 11 | TMDS Ground | 23 | TMDS Clock+ |
| 12 | Floating | 24 | TMDS Clock- |

3.1.1.2 Cable length:

1500mm +/- 20mm

3.1.2 Video signals:

RGB separate, Analog 0.7Vp-p/75 Ohm

3.1.3 Sync signal:

- H/V separate, TTL level
- H/V composite, TTL level

3.2 Function

3.2.1 Support timing

This Interface board is designed to operate in any of the following video mode.

| Incoming display mode (Input timing) | | | | | Multi-scan operation |
|--------------------------------------|------------|----------|-----------|--------|---------------------------|
| Resolution | Horizontal | Vertical | Dot Clock | Remark | Actual display resolution |
| 640x350 | 31.47(P) | 70.08(N) | 25.17 | DOS | 1280x943 |
| 720x400 | 31.47(N) | 70.08(P) | 28.32 | DOS | full screen |

Q7T3-FP737S-Dual function LCD Monitor Service

Engineering Specification

| | | | | | |
|-----------|----------|----------|--------|-----------|-----------|
| 640x480 | 31.47(N) | 60.00(N) | 25.18 | DOS | 1280x1024 |
| 640x480 | 35.00(N) | 67.00(N) | 30.24 | Macintosh | |
| 640x480 | 37.86(N) | 72.80(N) | 31.5 | VESA | |
| 640x480 | 37.50(N) | 75.00(N) | 31.5 | VESA | |
| 800x600 | 37.88(P) | 60.32(P) | 40.00 | VESA | |
| 800x600 | 48.08(P) | 72.19(P) | 50.00 | VESA | |
| 800x600 | 46.86(P) | 75.00(P) | 49.50 | VESA | |
| 832X624 | 49.72(N) | 74.55(N) | 57.29 | Macintosh | |
| 1024x768 | 48.36(N) | 60.00(N) | 65.00 | VESA | |
| 1024x768 | 56.48(N) | 70.10(N) | 75.00 | VESA | |
| 1024x768 | 60.02(P) | 75.00(P) | 78.75 | VESA | |
| 1024X768 | 60.24(N) | 74.93(N) | 80.00 | Macintosh | |
| 1152x864 | 67.50(P) | 75.00(P) | 108.00 | VESA | |
| 1152x870 | 68.68(N) | 75.06(N) | 100.00 | Macintosh | |
| 1152x900 | 61.80(N) | 66.00(N) | 94.50 | SUN 66 | |
| 1152x900 | 71.81(N) | 76.14(N) | 108.00 | SUN | |
| 1280x1024 | 64.00(P) | 60.00(P) | 108.00 | VESA | |
| 1280x1024 | 75.83(N) | 71.53(N) | 128.00 | IBM1 | |
| 1280x1024 | 80.00(P) | 75.00(P) | 135.00 | VESA | |
| 1280x1024 | 81.18(N) | 76.16(N) | 135.09 | SPARC2 | |

Notes :

- (1) If the incoming display mode is not supported by this I/F board listed above, the picture can show up or doesn't which is unpredictable, even the picture can display but probably isn't good or clear.
- (2) Some signals from graphics board may not function properly.
- (3) "P", "N" stands for "Positive", "Negative" polarity of incoming HSYNC/VSYNC(input timing).
- (4) OSD will show "No Signal" message on the screen as below to indicate it while no display mode inputs.
- (5) OSD will show "No Cable Connection" message on the screen as below to indicate it while no cable

plug in PC.

(6) OSD will show “Out of Range” message on the screen to indicate it while input display mode meet the following condition

- (a) The resolution is large than 1280x1024.
- (b) The resolution is 1280x1024 but it frequency of vertical sync (Fv) is large than 77Hz.
- (c) The frequency of horizontal sync (Fh) is large than 83KHz.
- (d) The frequency of vertical sync (Fv) is large than 76Hz.

3.3 Number of display colors:

262k color numbers

3.4 Adjustment function

Brightness

Contrast

Display position (Vertical , Horizontal)

Phase

Pixel clock

Color gain(Red, Green, Blue)

OSD position (Vertical , Horizontal)

Multi-language selection

OSD time

Input selection(analog/DVI)

Recall function(Color Recall、 Recall All)

3.5 Power Supply Requirements

3.5.1 Input Power Requirements

(1) Input Voltage Range

The unit shall meet all the operating requirements with an input voltage range of 90~264 Vac .

(2) Input Current

| | |
|---------------------------------------|---------------------------------|
| Maximum Input Current (MAX) 2 Arms | Measuring Range 90Vac 264Vac |
|---------------------------------------|---------------------------------|

(3) Frequency Range

The unit shall operate within a frequency range of 47Hz to 63Hz.

(4) Inrush Current

Power supply inrush current shall be less than the ratings of its critical components (including Power switch, fuse, rectifiers and surge limiting device) for all conditions of line voltage.

(5) Regulator Efficiency

70% minimum (measuring at 115Vac and full load)
Power saving mode < 1 Watts at 115vac

3.5.2 Output Power Requirement

The power circuit shall supply DC power outputs as followings:

| Output | Nominal | Regulation | Load Current Range |
|--------|----------|------------|--------------------|
| 1 | 5V-panel | ±10% | 0 ~ 1.0A |
| 2 | 3.3V-Fix | ±5% | 0 ~ 1.0A |

3.5.3 Power Management

| Mode | H/Vsync | Power consumption | LED Color (Status) | Recovery Time |
|--------|------------------------|--|--------------------|---------------|
| Normal | Both exist | < 40W | Blue (Normal) | -- |
| off | None or Only one exist | < 1W, under 115Vac < 2W, under 264Vac | Amber | < 3 sec |

3.6 Specification of Inverter

The backlight system is an edge-lighting type with 4 CCFLs (Cold Cathode Fluorescent Tube).

The characters of dual lamps are shown in the following tables.

| ITEM | SYMBOL | MIN | TYP | MAX | Unit | Condition |
|-----------------------|--------|--------|-----|-----|------|------------|
| Lamp Voltage | VL | -- | 650 | -- | V | IL=6.5 mA |
| Lamp Current | IL | 2.5 | 6.5 | 7 | mA | Each Lamp |
| Inverter Frequency | FL | 40 | 60 | 70 | kHz | |
| Starting lamp voltage | VS | 1250 | -- | -- | V | Tb=0°C |
| | | 1000 | -- | -- | V | Ta=25°C |
| Lamp life time | LT | 50,000 | -- | -- | Hr | Ta=25±2 °C |

NOTE: 1.All condition are at 25C ambient unless otherwise specified.

2. Load Panel="SXGA 17"

3.7 Panel optical Characteristics

| Item | Unit | Conditions | Min. | Typ. | Max. |
|--|----------------------|--------------------------------------|----------|----------|------|
| Viewing Angle | [degree] | Horizontal (Right) CR = 10 (Left) | 60 60 | 70 70 | - |
| | | Vertical (Up) CR = 10 (Down) | 60 60 | 70 70 | - |
| | | Horizontal (Right) CR = 5 (Left) | 70 70 | 80 80 | - |
| | | Vertical (Up) CR = 5 (Down) | 70 70 | 80 80 | - |
| Contrast ratio | | Normal Direction | 300 | 450 | - |
| Response Time (Note 1) | [msec] | Raising Time | - | 4 | 5 |
| | | Falling Time | - | 12 | 20 |
| | | Raising + Falling | - | 16 | 25 |
| Color / Chromaticity Coordinates (CIE) | | Red x | 0.61 | 0.641 | 0.67 |
| | | Red y | 0.31 | 0.342 | 0.37 |
| | | Green x | 0.26 | 0.292 | 0.32 |
| | | Green y | 0.58 | 0.611 | 0.64 |
| | | Blue x | 0.11 | 0.147 | 0.17 |
| | | Blue y | 0.04 | 0.068 | 0.10 |
| Color Coordinates (CIE) White | | White x | 0.28 | 0.313 | 0.34 |
| | | White y | 0.30 | 0.329 | 0.36 |
| White Luminance @ CCFL 7.0mA (center) | [cd/m ²] | | 200 | 260 | - |
| Luminance Uniformity (Note 2) | [%] | | 75 | 80 | - |
| Crosstalk (in 75Hz) (Note 3) | [%] | | | | 1.5 |


Note :

1. Viewing Angle, Contrast Ratio, Response Time, Reflectance, and Chromaticity are measured at panel center.
2. Viewing Angle (,)

Measurement is done on position 1.

Viewing angle origine is the axis normal to the flat panel. Left (L) and Right (R) value are the maximum angles for which CR=10. Up (U) and (D) value are the maximum angles for which CR=10.

See figure below

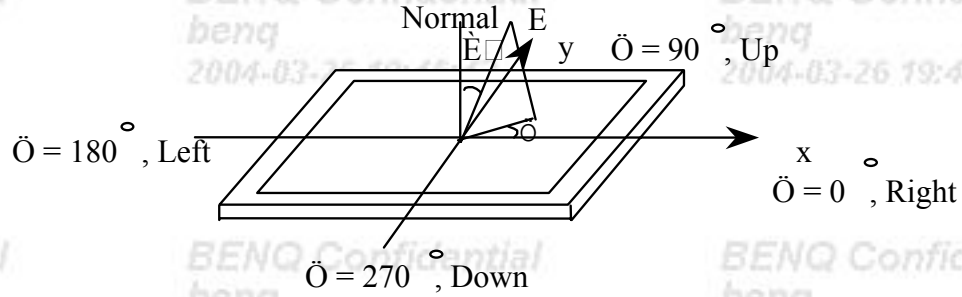

3. Contrast Ratio (CR) is defined mathematically as:


$$\frac{\text{Luminance in White Level (Max.)}}{\text{Luminance in Black Level (Min.)}}$$

(at $\theta = 0^\circ, \varphi = 0^\circ$)


4. Response time

TrR measures the transition time of L1 relative luminance from white to black state, from 90% to 10% (see graph below)

TrD measures the transition time of L1 relative luminance from black to white state, from 10% to 90% (see graph below)

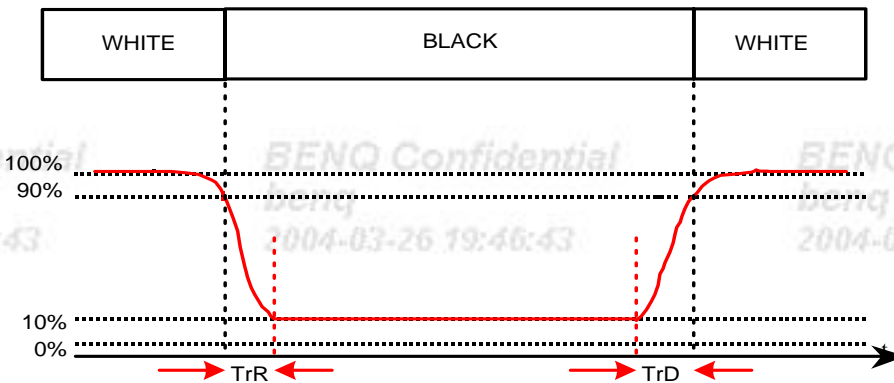

5. Cross talk shall be measured between two patterns.

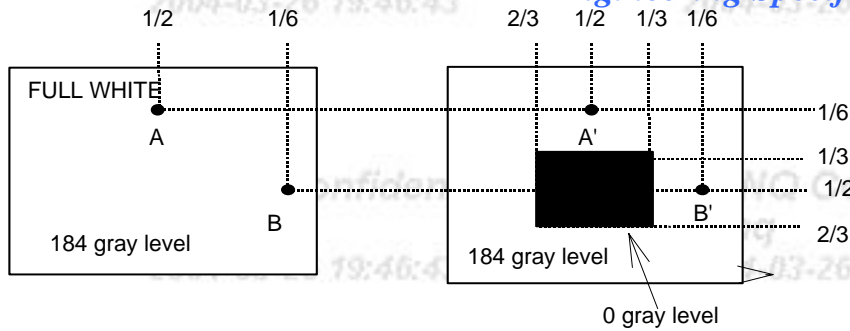


$1 | L_A - L_{A'} | / L_A \times 100\% = 1.2\% \text{ max.}$, L_A and L_B are brightness at location A and B
 $1 | L_B - L_{B'} | / L_B \times 100\% = 1.2\% \text{ max.}$, $L_{A'}$ and $L_{B'}$ are brightness at location A' and B'

LA : Luminance of measured point in A (cd/m2)
 LB : Luminance of measured point in B (cd/m2)
 LA' : Luminance of measured point in A' (cd/m2)
 LB' : Luminance of measured point in B' (cd/m2)

(at Viewing Angle = 0°, = 0°)

6. Brightness Uniformity of these 9 points is defined as below:

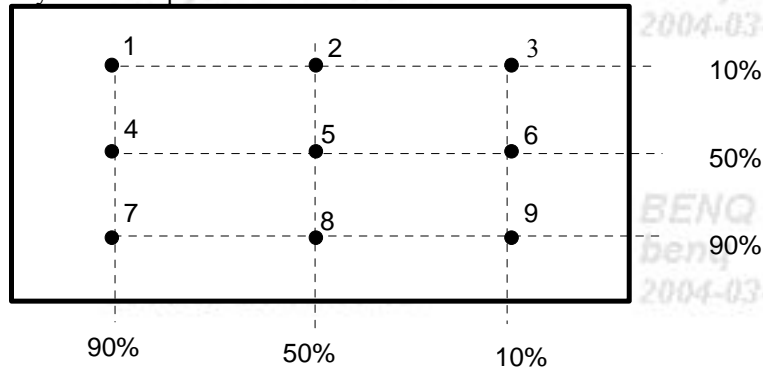

$$\text{Brightness Uniformity} = \text{Min. brightness} / \text{Max. brightness} \times 100\% > 70\%$$

4. Functional specification

All the tests to verify specifications in this section must be performed under the following standard conditions unless otherwise noted. The standard conditions are:

- Temperature : 0 to 40 degree Celsius
- AC line input voltage : 90 Vac to 264 Vac, 47Hz or 63Hz
- Warm-up time : 30 minutes minimum

4.1 Display Quality

4.1.1 Display Data Area (with full white pattern)

(1) Horizontal: 337.920 mm

(2) Vertical: 270.336 mm

4.1.2 Video Performance

- (1) Resolution : 1280 X 1024 pixels Maximum
- (2) Contrast ratio : 250(Min.), 500(Typ.)
- (3) Response time : 16 mS(Typ.)
- (4) Viewing angle : Up:70° Down:70° R/L:70° (At contrast ratio >= 10)
- (5) CIE Coordinate: White (0.31, 0.33) +/- (0.03, 0.03) (at user mode)
- (6) Display color: 262k bits color

4.1.3 Light Output

Brightness rating : 260cd/m²(Typ.) @7.0mA

4.1.4 Brightness Adjustment Range

At contrast ratio control set at maximum level, adjusting Brightness control from minimum to maximum position, the light output of WHITE pattern shall be increased more than 40cd/m².

5. Physical Specifications

5.1 Physical Dimension & Appearance

5.1.1 Overall Dimensions:

375mm (W) X 370mm (H) X 155mm (D)

5.1.2 Outer Appearance:

see Fig.1

5.2 Construction and Materials on outer surface

- (1) Materials: Plastic
- (2) Color: To be defined for Model

5.3 Base

- (1) Tilt: first hinge:0°~ 25°

5.4 Marking & Labels

5.4.1 Reference Label (Rear panel)

- (1) Reference numbers
- (2) Manufacture data
- (3) Agency Approvals
- (4) Power Ratings

5.4.2 Controls & Connectors

- (1) AC power cord input: abbreviated labels
- (2) User's Controls: standard print

5.5 Packaging

5.5.1 Carton Dimension:

456mm (W) X395mm (D) X 146mm (H) (LCD monitor)

5.5.2 Shipping Weight:

5.5kg (LCD monitor)

5.5.3 Shipping Container:

2100 sets per 40 feet container with pallet.

6. Maintainability Specifications

6.1 General & Requirements

6.1.1 Installation:

From outside of unit with standard tools and documentation provided to user.

6.1.2 Periodic Maintenance:

No periodic maintenance is required.

6.1.3 Repair & Calibration:

Require spare modules or components as specified as followings:

- (1) Interface board ASSY
- (3) AC-DC converter board ASSY
- (4) Control board ASSY

6.2 Mean Time to Repair

6.2.1 Module Level:

Less than 10 minutes

6.2.2 Component Level:

Less than 15 minutes

6.3 Accessibility

6.3.1 General:

All panels, covers, and major assemblies are removable without disruption of permanent mounting or fasteners.

6.3.2 Outside Cabinet, access to the following elements

- Operating Controls
- AC Inlet

6.3.3 Cover Removal, Access

All sub assemblies and internally adjustable components may be accessed by removing the base and the rear cover .

6.4 Equipment & Tools Required

6.4.1 Standard Test Equipment

- (1) Voltmeter
- (2) Dual trace oscilloscope
- (3) Hand tools as required
- (4) Computer with IBM VGA , or compatible graphic adapter

6.4.2 Documentation

A service manual will be available which covers all service requirements. A users manual written in Japanese German, Italian, Spanish, France and English will be available to ship with the product.

6.5 Electrical Emission and Energy Saving summary for TCO03

6.5.1 Electrical Field(AC):

*Band I< 10V/m (132cd/m²,”+” pattern)

*Band II< 1V/m (132cd/m²,”+” pattern)

Note: Shielded power cord is not acceptable

6.5.2 Magnetic Field(AC):

*Band I< 200nt (132cd/m²,”+” pattern)

*Band II< 32nt (132cd/m²,”+” pattern)

Note: Shielded power cord is not acceptable

6.5.3 Energy Saving:

*1st stage:<15W(recover time:3 sec)

2nd stage:<5W

*single stage:<5W(recover time: 3sec)

Appendix 1 – Shipment Conditions

| ITEM | State |
|----------------|-------------|
| Power | ON |
| Brightness | 90 |
| Contrast | 50 |
| OSD- Timeout | 20s |
| OSD-Language | English |
| OSD-Image size | Full Screen |
| OSD-Color temp | SRGB MODE |

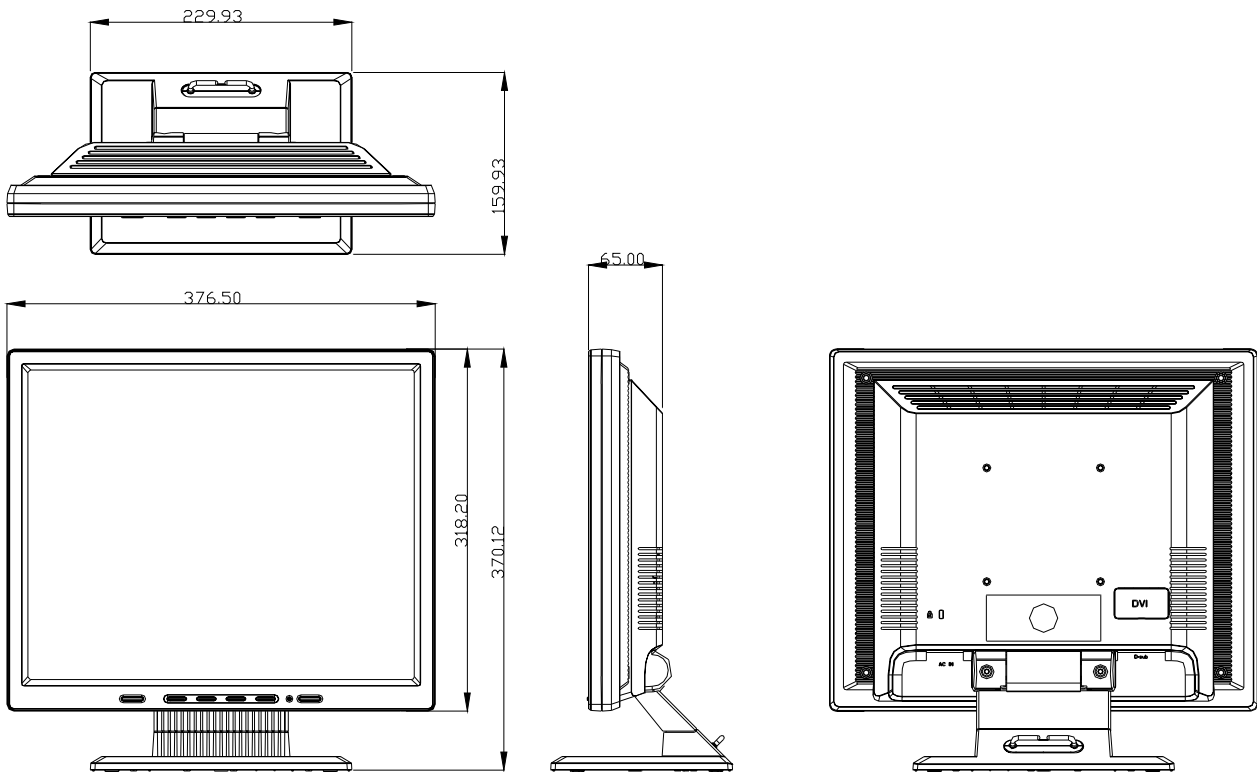


Fig. 1 Physical Dimension Front View and Side view